




DEGER D60H & D25H

DATA SHEET

WE ARE AT YOUR SERVICE WORLDWIDE

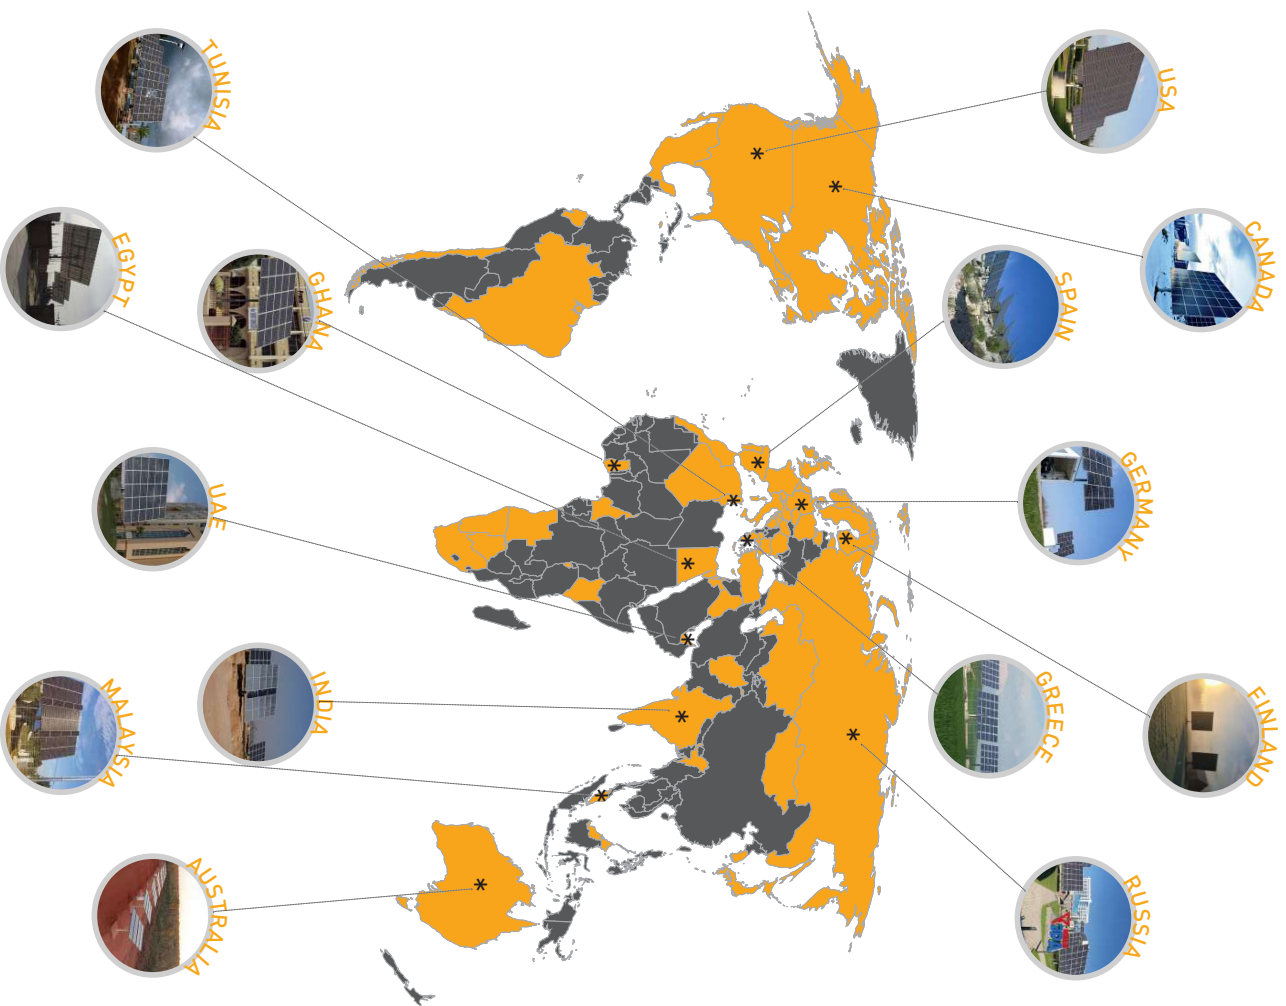


* Sample Projects

Dual-Axis Tracking System

Dual-axis, active tracking systems from DEGER enable the optimal utilization of all the irradiation energy, suitable for all widely-sold solar modules. With the patented sensor-based MLD technology you can achieve yield increases of approx. 45% for all photovoltaic applications. An easy plug-and-play installation is realized by means of the stable supporting construction. The decentralized control enables maximum independence. DEGER systems are "designed in Germany" - and stand for quality and durability.

Rating chart using a sunny summer day as an example

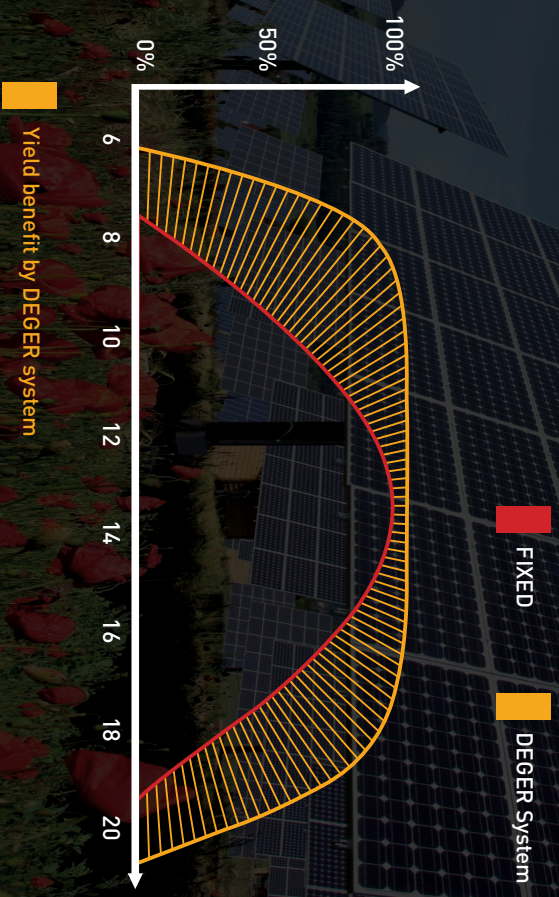

ADVANTAGES



Module carrier profiles made from aluminum



Availability of aluminum module carrier profiles in three different of heights: 65mm, 85mm and 100mm.




Frame and mast made from hot dipped galvanized steel



Thanks to the flange plates on the mast, it is possible to mount dual axis tracking systems to building side walls (optional)



Non-linked rows



Low power consumption



Roll forming profiles are not used on any DEGER trackers



Intelligent Maximum Light Detection (MLD) system, up to 45% yield increase with MLD technology.



Fast and simple plug-and-play installation



High functional reliability and low-maintenance operation



No need for pouring concrete thanks to the DEGER Steel Foundation (optional)



Dual axis tracking systems that can be designed for up to 72 m² module surface

TECHNOLOGY



Intelligent Maximum Light Detection (MLD) system, up to 4,5% yield increase with MLD technology.



Automatic reset to sunrise position overnight



Yield increase with snow sensor



Possibility of mounting anemometer directly on the tracking system with the pendulum kit



Adjustable wind speed limit via DEGER wind speed display unit (Maximum 12 m/s)



Cleaning positions set via Central Control Box (CCB) III



Adjustable tracking system movement positions via Central Control Box (CCB) III



Fewer electronic parts required.



Wind speed stability for up to 170 km/h



DEGER bolted mast can be used on open land and building integrated (optional)



Wind protection with anemometer




DC motor technology


MLD Technology

- Intelligent Maximum Light Detection (MLD) system, Up to 45% yield increase with MLD technology.


Technology that is proactive gets more out of the sun. The light irradiation's intensity is influenced by a number of factors – primarily clouds, of course. That is why it is crucial that a smart control is able to react to the conditions accordingly. The MLD principle takes on that task.

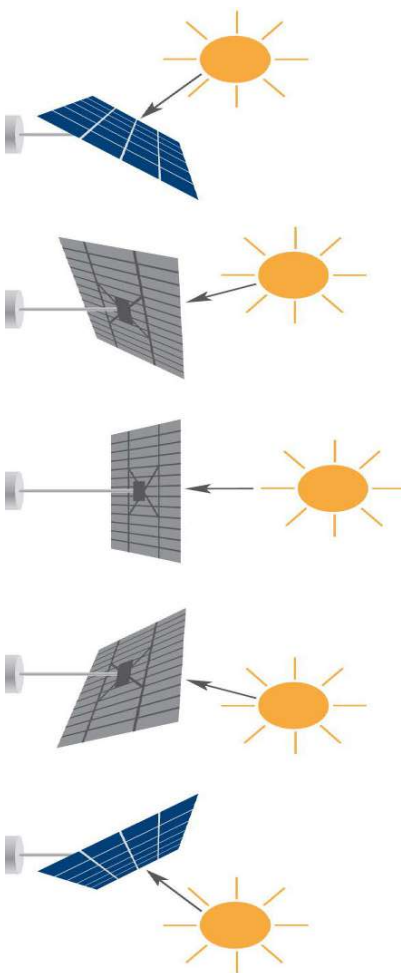


Sunshine: The DEGER system directly faces the sun all day.




Reflecting surface:
The DEGER system uses direct solar irradiation as well as energy from reflected light.



Partly clouded:
In addition to the direct solar irradiation diffused light is also used to maximize the effect.




Overcast sky:
The DEGER system catches all the diffused light by moving to horizontal position.

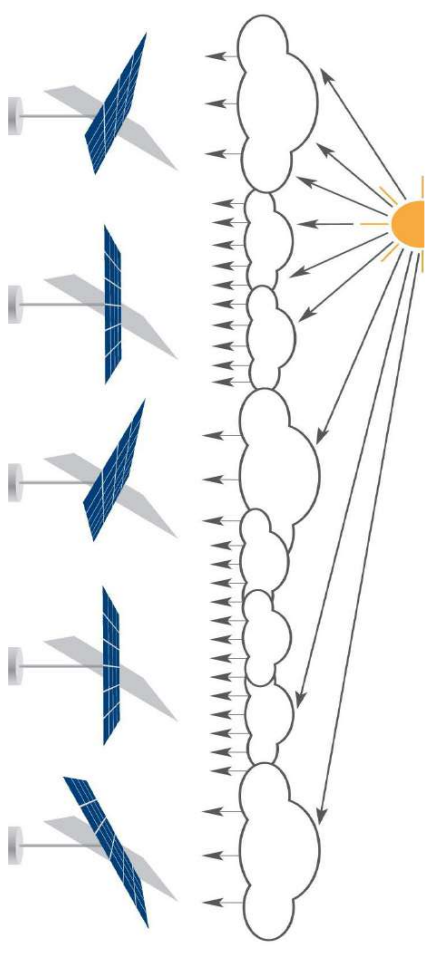


Varying light conditions:

Because of different levels of cloudiness, the light conditions in solar park vary for each DEGER tracker. The individual control makes sure every DEGER system is optimally oriented to the brightest source of irradiation. This guarantees the highest energy yield possible.

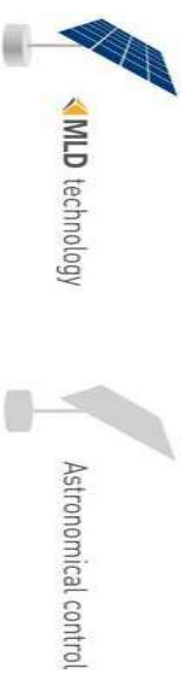

The MLD-Sensor – the critical component in the MLD principle of controlling tracking systems.

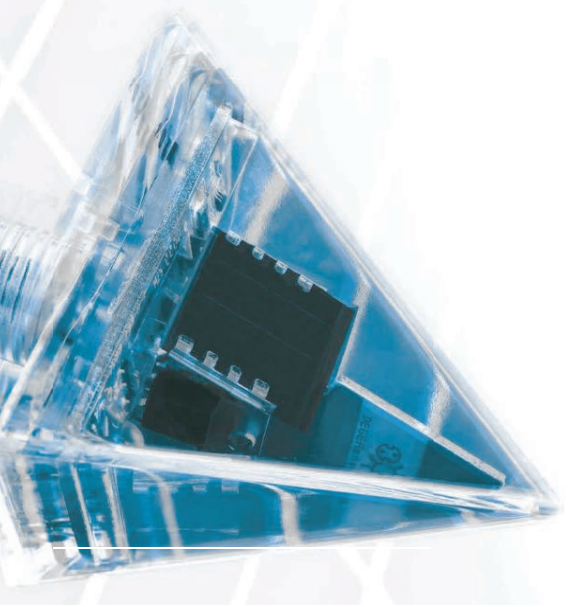

Technical Specification



BASIC DATA	DEGER D60H	DEGER D25H
Nominal Output (Depending On Module)	3,000 – 10,000 Wp	2,000 – 6,000 Wp
Tracking Type	2-axis	
Module Surface Approx.(max.)	40 m ²	25 m ²
Max. Module Surface (W x H)	8,3 m x 5,3 m	5,05 m x 5,05 m
60-cell Standard Module (max.)	24	15
72-cell Standard Module (max.)	20	12
Option For Building Integration	Yes	
East - West Angle	300 °	
Elevation Angle	0° – 80 °	
Approvals	CE, EN,UL,CSA	

STRUCTURE		
Materials	Hot-Dip Galvanized Steel, Aluminum, Synthetics	
Galvanization	EN ISO 1461 or comparable	
Bond-Type	Bolted Connection, No Welding On Site	
Wind Tunnel Tested	Yes	
Static Design Calculations	Yes	
Weight (Without Mast/Aluminum)	890 kg	650 kg

DRIVE

Elevation Actuator	800 mm lifting
East-West Angle (with snow)	gears in drive head
Spin Speed Elevation	13°/min
Spin Speed Azimuth	30°/min
Sound Level	at a distance of 10 meters: 20-40 dB(A)
Protection Class	IP 67

ELECTRONICS & CONTROL

Operating Voltage	100 – 240 V AC / 50 – 60 Hz	
Rated Input Current	2 A	
Control	MLD-Technology	
Protection Class	IP 65	

POWER CONSUMPTION (APPROX)

Control Mode	1 W	
With Running Actuator	15 W	14 W
Internal Consumption Per Year	14 kWh	12 kWh

POWER OUTPUT

Output Voltage	24 V DC
Output Current (max.)	2,5 A

CLIMATIC CONDITIONS

Installation Over Sea Level	max. 2000 m
Permissible Ambient Temperature	-20°C – +50°C
Humidity Range	5% – 95%
Permitted Wind Speed	up to 170 km/h ⁽¹⁾

(1) With full occupancy- Laid out with planning tool

SCOPE OF DELIVERY

Complete dual-axis tracking systems, solar module carrier system made of aluminum - matching the module type used, patented MLD control. (Maximum Light Detection) with MLD sensor and assembly instructions

OPTIONAL SERVICES

Assembly support, trainings and on-site service.

Comparative measurements: Up to 42.9% Yield Increase

In the comparative measurement four different systems for generating solar energy were examined in solar park REXINGEN in southern Germany. The aim of the two-year study was to determine the efficiency and higher yield of the photovoltaic modules compared to fixed tilt installed, astronomical tracked and tracking by MLD sensors of single- and dual-axis systems.

CONDITIONS

The efficiency of solar panels depends on various factors such as temperature, air pressure and radiation values. So that the comparison measurements were carried out under the same conditions, all four systems were installed on the former landfill in REXINGEN and equipped with the same modules and inverters.

Measurement of yield was determined for two years and was carried out under the following parameters and performance

Installation site	48° 26' 50" North, 8° 39' 48" East
Elevation N	569 meters
Irradiation	1,010 kWh/kWp (PVGIS)
Installed modules	Per unit 36 modules Sanyo HIP-215NKHET1
Nominal power	7.74 kWp
PV Inverter	Per unit one SMA SMC 8000TL
Nominal power	8.0 kW

SYSTEM 1

Fixed tilt installation 30° south-facing



SYSTEM 2

Single-axis DEGGER tracker with MLD sensor



SYSTEM 3

Dual axis astronomical controlled



SYSTEM 4

Dual-axis DEGGER tracker with MLD sensor




ANALYSIS PROCEDURES

For the evaluation two different methods were used. The normalization method, in which all performance variables such as cable length, actual module output, inverter efficiency and other similar variables are taken into account. By the evaluation with the standard method the yield takes into account a theoretical consideration of the cable losses resulting directly from the measured data without further corrective calculation.


Results

According to the one hundred percent availability of data in 2012 the following values are determined with the standard method:

COMPARATIVE MEASUREMENTS IN 2012 IN SOLAR PARK REXINGEN

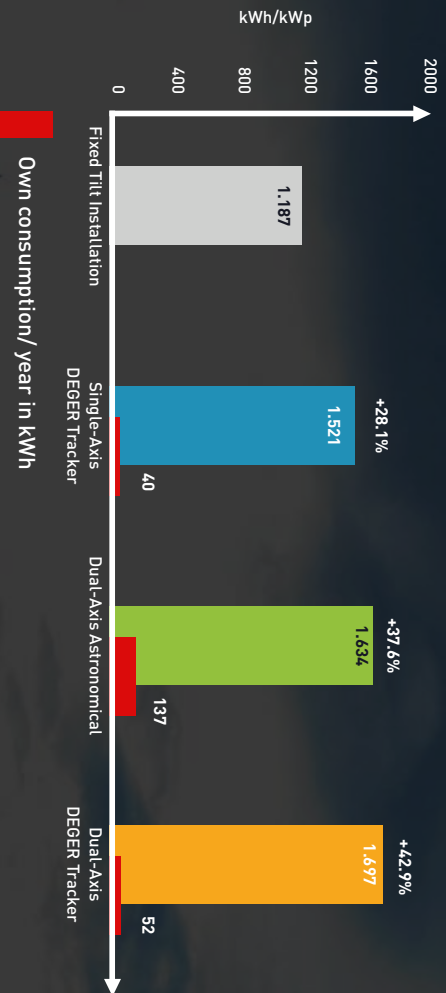

ADDITIONAL YIELD MONTHLY RESULTS IN 2012 COMPARED TO FIXED TILT SYSTEMS

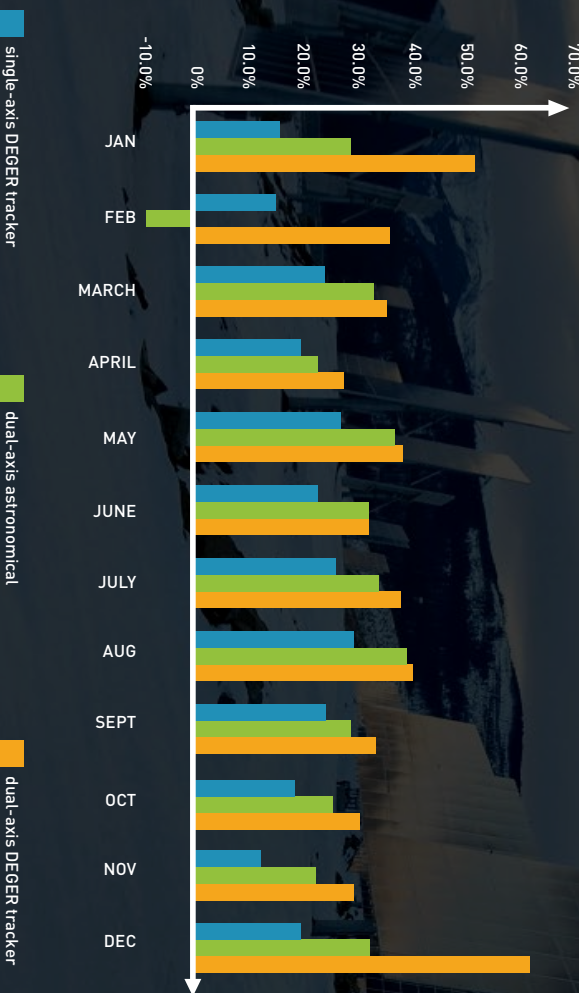

ADDITIONAL YIELD MONTHLY RESULTS IN 2012 COMPARED TO FIXED TILT SYSTEMS IN PERCENT


	JAN	FEB	MAR	APR	MAY	JUNE	JULY	AUG	SEP	OCT	NOV	DEC
single-axis DEGER tracker	15.7%	15.2%	24.4%	19.8%	27.2%	23.1%	26.5%	29.5%	24.7%	18.8%	12.4%	19.8%
dual-axis astronomical	29.4%	-8.9%	33.5%	23.0%	36.8%	32.5%	34.4%	39.4%	29.0%	25.9%	22.6%	32.5%
dual-axis DEGER tracker	52.5%	36.2%	35.9%	27.8%	39.6%	32.6%	38.5%	40.6%	33.8%	30.6%	29.5%	62.3%

THE RESULT OF THE STUDY

- ◇ DEGER dual axis tracker are generating a 42.9% higher yield compared with static systems,
- ◇ DEGER single axis tracker are generating a 28.1% higher yield compared with static systems,
- ◇ DEGER tracker are generating a 5.3% higher yield compared with astronomical controlled systems.
- ◇ DEGER tracker have the lowest operating power consumption compared to the measured tracking systems in this study.
- ◇ During the winter, astronomically controlled units may not even outperform fixed systems when foggy or cloudy conditions are present. Only MLD technology senses that the diffuse irradiation is best captured with by presenting the most surface area possible.



WE ARE AT YOUR SERVICE WORLDWIDE

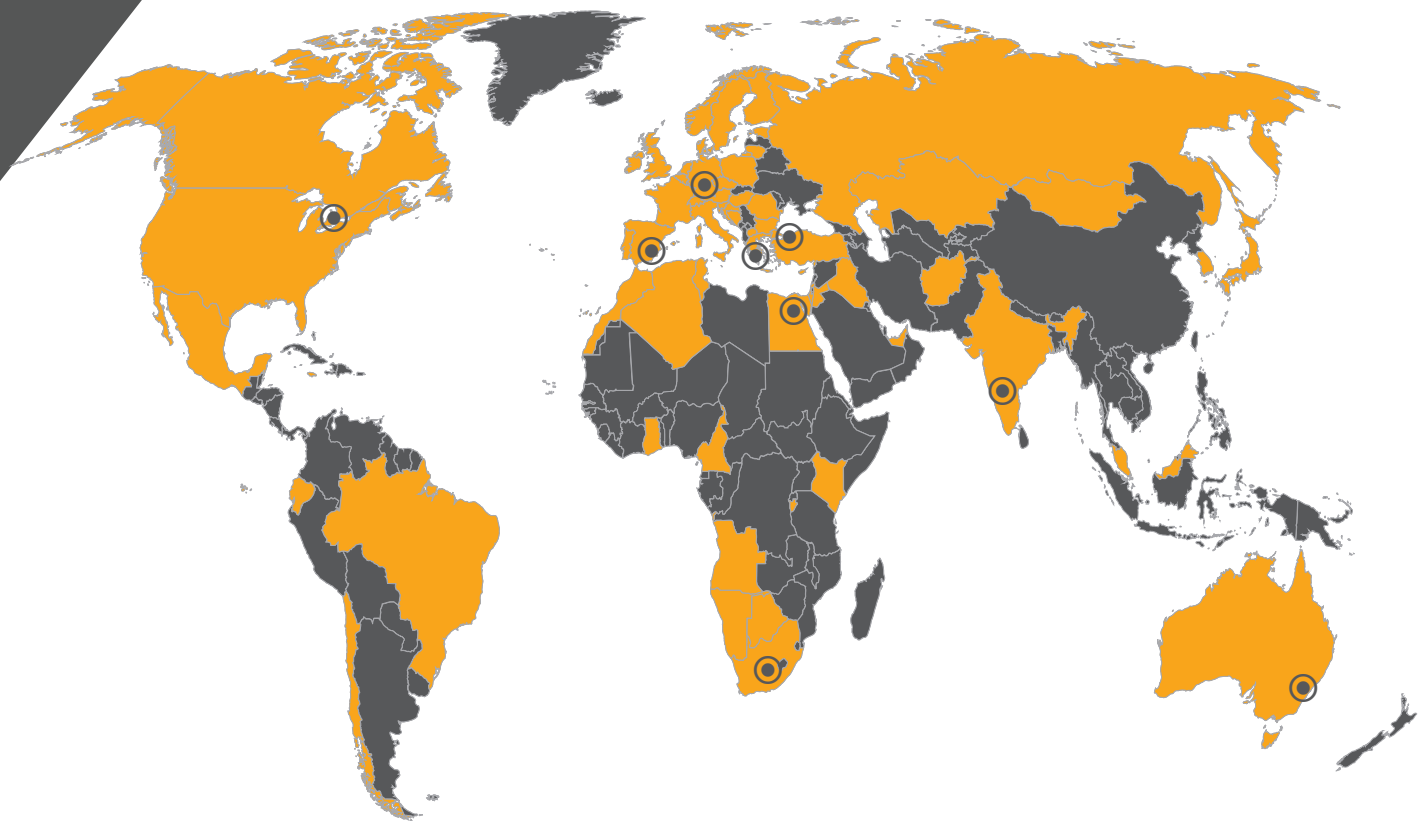

DEGERenergie GmbH & Co. KG

Industriestraße 70


72160 Horb am Neckar

Germany

Phone: +49 7451- 53914-0

Fax: +49 7451-53914-10

E-Mail: info@DEGERenergie.com

 Sales and production locations

 Installed DEGER systems